


## Expospot 70 adjustable - Sylvania

EXPOSPOT 70 ADJUSTABLE RA80 3000K WB WHITE  
0060239



### Product features

- Integrated LED adjustable accent downlight, single head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 54°, optics: aluminium reflector and lens combination, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 2082lm, 99lm/W, LOR: 100%, colour rendering: Ra 80 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 70% of the original output (L70B50), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 126mm, outer dimensions: 137x101mm, weight: 0.52kg.

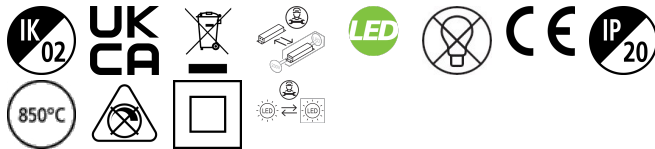

### PRODUCT OVERVIEW

Product name	EXPOSPOT 70 ADJUSTABLE RA80 3000K WB WHITE
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	2082
Luminaire efficacy (lm/W)	99
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	54
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288602394

### DATA TABLE

#### General data

Product name	EXPOSPOT 70 ADJUSTABLE RA80 3000K WB WHITE
--------------	--

## Expospot 70 adjustable - Sylvania

EXPOSPOT 70 ADJUSTABLE RA80 3000K WB WHITE  
0060239

Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	2082
Luminaire efficacy (lm/W)	99
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	54
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	21
Mains voltage (V)	230-240V~
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Drive current (mA)	500
Inrush Current (A)	28
Inrush Duration (µs)	139
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	31
Max. Luminaires per 13A C Breaker	41
Max. Luminaires per 16A C Breaker	51
Max. Luminaires per 20A C Breaker	70
Max. Luminaires per 10A B Breaker	19
Max. Luminaires per 13A B Breaker	25
Max. Luminaires per 16A B Breaker	31
Max. Luminaires per 20A B Breaker	42

### Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B20	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B20	60000

## Expospot 70 adjustable - Sylvania

EXPOSPOT 70 ADJUSTABLE RA80 3000K WB WHITE  
0060239

Lifespan L80 B10	60000
Lifespan L90 B50	60000
Lifespan L90 B20	60000
Lifespan L90 B10	55000


### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	137
Nominal Product Height (mm)	101
Cutout Dimensions (W x L in mm or Diameter in mm)	126
Weight (kg)	0.52
Recessed Depth (mm)	101

### Packaging

Single packaging type	Carton
Product EAN number	5410288602394
Packaging single length / height (cm)	18.0
Packaging single width (cm)	18.0
Packaging single depth (cm)	16.0
DUN14 (outer)	05410288602394
Units per outer package	1
Packaging outer length / height (cm)	18.0
Packaging outer width (cm)	18.0
Packaging outer depth (cm)	16.0

## PHOTOMETRY

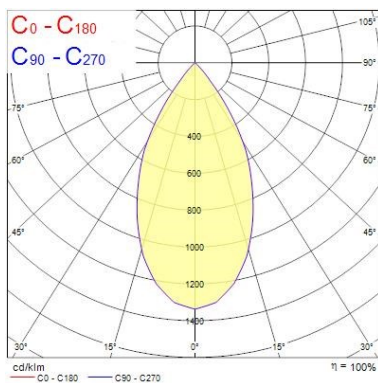

Distance [m]	Cone diameter [m]	E <sub>1</sub> (0°) [lx]	E <sub>1</sub> (C0) [lx]
0.5	0.50	11138	590
1.0	1.01	2785	296
1.5	1.51	1238	442
2.0	2.01	696	249
2.5	2.51	448	189
3.0	3.02	309	111

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 53.4°)

## TECHNICAL DRAWINGS

## Expospot 70 adjustable - Sylvania *EXPOSPOT 70 ADJUSTABLE RA80 3000K WB WHITE* 0060239

