


Start Surface IP66 Ø300mm START SURFACE IP66 1050LM 830 IK10 BLK 0049284



Product features

- LED exterior surface mounted luminaire, 1050lm, 12W power consumption, 88lm/W efficacy, 3000K color temperature, CRI80, non-dimmable, IP66, IK10, 50,000 hours (L70), black housing, vandal resistant

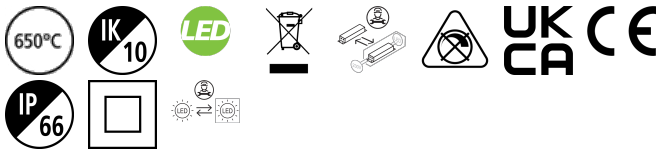


PRODUCT OVERVIEW

Product name	START SURFACE IP66 1050LM 830 IK10 BLK
Technology	LED
Housing	PC Polycarbonate
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4274494
E-number SE	7505128
Warranty	5 years
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	88
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Beam Angle (°)	120
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492841

PHOTOMETRY

Start Surface IP66 Ø300mm *START SURFACE IP66 1050LM 830 IK10 BLK* 0049284

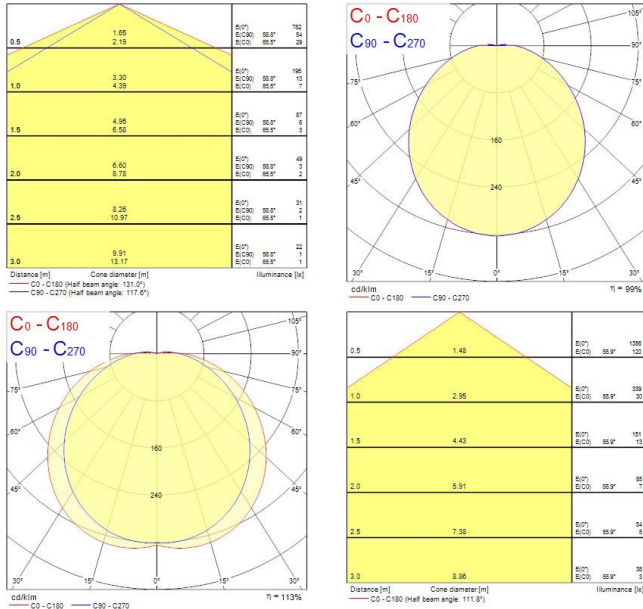

TECHNICAL DRAWINGS

