

# Brio IP65 LED - Vandal Resistant

*BRIO IP55VR LED 3000K DALI*  
4054962



## Product features

- BRIO IP55VR LED 3000K DALI



## PRODUCT OVERVIEW

Product name	BRIO IP55VR LED 3000K DALI
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC002892
Warranty	5 years
Colour temperature (K)	3000
Electrical protection	Class II
Control gear mounting	Integral
Housing colour	White
IP rating	IP55
IK rating	IK10
Product EAN number	5026524549622

## DATA TABLE

### General data

Product name	BRIO IP55VR LED 3000K DALI
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC002892
Warranty	5 years

### Optical data

Colour temperature (K)	3000
Correlated colour temperature range (K)	3000 - 3000

## Brio IP65 LED - Vandal Resistant

*BRIO IP55VR LED 3000K DALI*  
4054962

Adjustable chromaticity	N
Distribution type	Symmetric

### Electrical data

Mains voltage (V)	230V~
Electrical protection	Class II
Control gear mounting	Integral
Transformer required	Yes
Drive current (mA)	350



### Physical data

Housing colour	White
IP rating	IP55
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Length (mm)	408
Nominal Product Width (mm)	358
Weight (kg)	3.0

### Packaging

Single packaging type	Carton
Product EAN number	5026524549622
Packaging single length / height (cm)	50.0
Packaging single width (cm)	50.0
Packaging single depth (cm)	20.0
DUN14 (outer)	5026524549622
Units per outer package	1
Packaging outer length / height (cm)	50.0
Packaging outer width (cm)	50.0
Packaging outer depth (cm)	20.0

## PHOTOMETRY

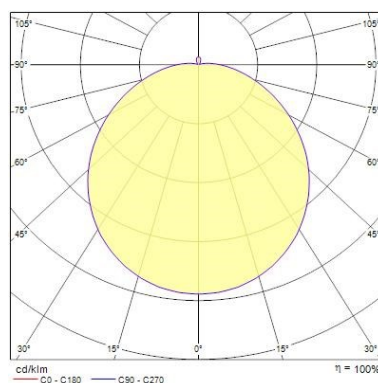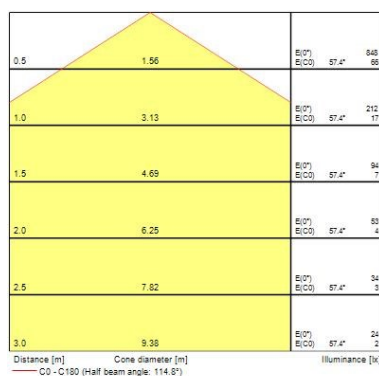

## Brio IP65 LED - Vandal Resistant


### BRIO IP55VR LED 3000K DALI

### 4054962

0.5	1.55	E(0°) E(C0)	57.1°	1555 127
1.0	3.09	E(0°) E(C0)	57.1°	396 32
1.5	4.64	E(0°) E(C0)	57.1°	178 14
2.0	6.18	E(0°) E(C0)	57.1°	99 8
2.5	7.73	E(0°) E(C0)	57.1°	63 5
3.0	9.27	E(0°) E(C0)	57.1°	44 4

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 114.2°)

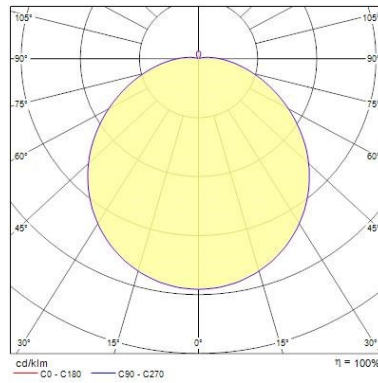

## TECHNICAL DRAWINGS

