



United Nations
Educational, Scientific and
Cultural Organization



In support of



International
Year of Light
2015

SYLVANIA



IVY 2

T5 recessed & surface luminaires

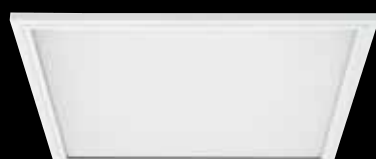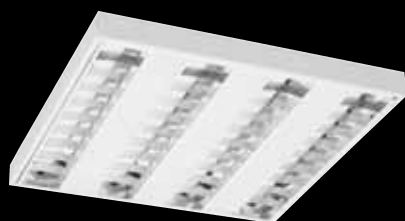

The new **Ivy 2** range of T5 recessed & surface luminaires was developed with circulation spaces, offices, meeting rooms and reception areas in mind. The range is perfect for spaces where a quick and cost effective retrofit is needed.

Ivy 2 is supplied in both warm white (3,000K) and neutral white (4,000K) in single, twin, three-way, four-way or asymmetric T5 versions - providing a solution all your lighting needs, while

keeping a consistent look across the scheme. Three optics are available depending on visual and performance requirements - satin bright, mirror bright or prismatic optic options.

Additionally, **Ivy 2** has energy efficient electronic gear including DALI and 3 hour emergency versions as standard. The range comes complete with protective film, lamps and a quick connector for easy installation.



SYLVANIA

IVY 2 - RECESSED LUMINAIRE


Prismatic optic

IVY 2 - RECESSED - FEATURES

- 14W & 28W T5 recessed luminaire
- Available in Mirror bright, Satin bright louvres and Prismatic Optic option
- Available in single, twin, three-way or four-way T5 versions (supplied with Sylvania T5 lamps)
- Achieves 81% LOR using the 3 x 14W lamp package (Bright louvre)
- High light: up to 7,920lm (luminaire output on Bright Louvre 4 x 28W 4,000K version)
- High efficiency: up to 69lm/W (total system efficiency on Bright louvre 3 x 28W 4,000K)
- Available in Warm white (3,000K) and Neutral white (4,000K)
- Energy efficient electronic gear including DALI and 3 hour emergency versions as standard
- Slim body for minimal impact into ceiling void
- Easy access terminal block for quick installation
- Retained and hinged louvre for easy and safe lamp changing
- Complete with protective film, tubes and quick connector for easy installation



Dimension (mm)

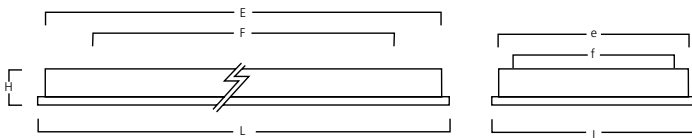

Lamp	L	I	E	e	F	f	H
Dimensions 600 x 600mm modules (mm)							
3 x 14W PO	596	596	574	574	500	265	82
4 x 14W PO	596	596	574	574	500	265	82
3 x 14W BR / SA	596	596	574	574	500	265	52
4 x 14W BR / SA	596	596	574	574	500	265	52
Dimensions 1200 x 300mm modules (mm)							
1 x 28W BR / SA	1,196	296	1,174	274	1,086	100	52
2 x 28W BR / SA	1,196	296	1,174	274	1,086	100	52
Dimensions 1200 x 600mm modules (mm)							
3 x 28W PO	1,196	596	1,174	574	1,086	100	82
4 x 28W PO	1,196	596	1,174	574	1,086	100	82
3 x 28W BR / SA	1,196	596	1,174	574	1,086	100	55
4 x 28W BR / SA	1,196	596	1,174	574	1,086	100	55

Prismatic Optic - IP44


Item number	Description	Connector	Colour name	Colour temp. (K)	Sylvania lamp description	Sylvania lamp item code	Energy class	Lamp package (W)	System Power consumption (W)	LOR (%)	Luminaire lumen Output (lm)	Efficacy (lm/W)
Electronic ballast												
0055480	IVY 2 3 x 14W 840 T5 EB PO IP44	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	77	2,453	52
0055504	IVY 2 3 x 28W 840 T5 EB PO IP44	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	4,849	57
0055481	IVY 2 4 x 14W 840 T5 EB PO IP44	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	76	3,240	52
0055505	IVY 2 4 x 28W 840 T5 EB PO IP44	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	68	6,465	58
DALI dimmable												
0055484	IVY 2 3 x 14W 840 T5 DALI PO IP44	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	77	2,453	52
0055508	IVY 2 3 x 28W 840 T5 DALI PO IP44	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	4,849	57
0055485	IVY 2 4 x 14W 840 T5 DALI PO IP44	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	76	3,240	52
0055509	IVY 2 4 x 28W 840 T5 DALI PO IP44	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	68	6,465	58
Emergency 3 hour												
0055482	IVY 2 3 x 14W 840 T5 EB E3 PO IP44	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	77	2,453	52
0055506	IVY 2 3 x 28W 840 T5 EB E3 PO IP44	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	4,849	57
0055483	IVY 2 4 x 14W 840 T5 EB E3 PO IP44	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	76	3,240	52
0055507	IVY 2 4 x 28W 840 T5 EB E3 PO IP44	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	68	6,465	58
DALI dimmable & Emergency 3 hour												
0055486	IVY 2 3 x 14W 840 T5 DALI E3 PO IP44	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	77	2,453	52
0055510	IVY 2 3 x 28W 840 T5 DALI E3 PO IP44	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	4,849	57
0055487	IVY 2 4 x 14W 840 T5 DALI E3 PO IP44	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	76	3,240	52
0055511	IVY 2 4 x 28W 840 T5 DALI E3 PO IP44	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	68	6,465	58

Legend: PO = Prismatic Optic; EB = Electronic Ballast; DALI = DALI dimmable; E3 = Emergency 3 hour; 840 = 4,000K T5 lamp


Prismatic louvre




Prismatic Optic - 3 x 14W 4,000K




Prismatic Optic - 3 x 28W 4,000K



Prismatic Optic - 4 x 14W 4,000K



Prismatic Optic - 4 x 28W 4,000K



IVY 2 - RECESSED LUMINAIRE

Bright louvre

Bright louvre

Item number	Description	Connector	Colour name	Colour temp. (K)	Sylvania lamp description	Sylvania lamp item code	Energy class	Lamp package (W)	System Power consumption (W)	LOR (%)	Luminaire lumen Output (lm)	Efficacy (lm/W)
Electronic ballast												
0056027	IVY 2 1 x 28W 830 T5 EB BR WIEL	Wieland	Warm white	3,000	FHE 28W/T5/830	0002882	A+	1 x 28	32	73	1,927	60
0055512	IVY 2 1 x 28W 830 T5 EB BR UGR19 MPM	MPM	Warm White	3,000	FHE 28W/T5/830	0002882	A+	1 x 28	32	68	1,634	51
0056028	IVY 2 2 x 28W 830 T5 EB BR WIEL	Wieland	Warm white	3,000	FHE 28W/T5/830	0002882	A+	2 x 28	64	73	3,843	60
0055513	IVY 2 2 x 28W 830 T5 EB BR UGR19 MPM	MPM	Warm White	3,000	FHE 28W/T5/830	0002882	A+	2 x 28	64	63	3,674	57
0056026	IVY 2 3 x 14W 830 T5 EB BR WIEL	Wieland	Warm white	3,000	FHE 14W/T5/830	0002870	A+	3 x 14	47	81	2,989	64
0055514	IVY 2 3 x 14W 830 T5 EB BR UGR19 MPM	MPM	Warm White	3,000	FHE 14W/T5/830	0002870	A+	3 x 14	47	75	2,831	60
0055745	IVY 2 4 x 14W 830 T5 EB BR WIEL	Wieland	Warm white	3,000	FHE 14W/T5/830	0002870	A+	4 x 14	62	79	3,887	63
0055515	IVY 2 4 x 14W 830 T5 EB BR UGR19 MPM	MPM	Warm White	3,000	FHE 14W/T5/830	0002870	A+	4 x 14	62	77	3,317	54
0056029	IVY 2 1 x 28W 840 T5 EB BR WIEL	Wieland	Warm white	3,000	FHE 28W/T5/830	0002882	A+	1 x 28	32	95	2,511	78
0056000	IVY 2 1 x 28W 840 T5 EB BR MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	1 x 28	32	73	1,927	60
0055746	IVY 2 2 x 28W 840 T5 EB BR MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	2 x 28	64	73	3,843	60
0055739	IVY 2 3 x 14W 840 T5 EB BR MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	81	2,989	64
0055488	IVY 2 3 x 28W 840 T5 EB BR MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	74	5,861	69
0055744	IVY 2 4 x 14W 840 T5 EB BR MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	79	3,887	63
0055489	IVY 2 4 x 28W 840 T5 EB BR MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	75	7,920	71
0055766	IVY 2 1 x 28W 840 T5 EB BR ASY MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	1 x 28	32	95	2,511	78
0056066	IVY 2 3 x 14W 840 625 EB BR MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	81	2,989	64
0056067	IVY 2 4 x 14W 840 625 EB BR MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	79	3,887	63
Analogue 1-10V dimmable												
0056032	IVY 2 1 x 28W 830 T5 DB10 BR WIEL	Wieland	Warm white	3,000	FHE 28W/T5/830	0002882	A+	1 x 28	32	73	1,927	60
0055516	IVY 2 1 x 28W 830 T5 1-10 BR UGR19 MPM	MPM	Warm White	3,000	FHE 28W/T5/830	0002882	A+	1 x 28	32	68	1,634	51
0056033	IVY 2 2 x 28W 830 T5 DB10 BR WIEL	Wieland	Warm white	3,000	FHE 28W/T5/830	0002882	A+	2 x 28	64	73	3,843	60
0055517	IVY 2 2 x 28W 830 T5 1-10 BR UGR19 MPM	MPM	Warm White	3,000	FHE 28W/T5/830	0002882	A+	2 x 28	64	63	3,674	57
0056030	IVY 2 3 x 14W 830 T5 DB10 BR WIEL	Wieland	Warm white	3,000	FHE 14W/T5/830	0002870	A+	3 x 14	47	81	2,989	64
0055518	IVY 2 3 x 14W 830 T5 1-10 BR UGR19 MPM	MPM	Warm White	3,000	FHE 14W/T5/830	0002870	A+	3 x 14	47	75	2,831	60
0056031	IVY 2 4 x 14W 830 T5 DB10 BR WIEL	Wieland	Warm white	3,000	FHE 14W/T5/830	0002870	A+	4 x 14	62	79	3,887	63
0055519	IVY 2 4 x 14W 830 T5 1-10 BR UGR19 MPM	MPM	Warm White	3,000	FHE 14W/T5/830	0002870	A+	4 x 14	62	77	3,317	54
0055531	IVY 2 3 x 14W 840 T5 1-10V BR MPM	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	81	2,989	64
0055532	IVY 2 4 x 14W 840 T5 1-10V BR MPM	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	79	3,887	63
DALI dimmable												
0056008	IVY 2 1 x 28W 840 T5 DALI BR MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	1 x 28	32	73	1,927	60
0056009	IVY 2 2 x 28W 840 T5 DALI BR MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	2 x 28	64	72	3,843	60
0056006	IVY 2 3 x 14W 840 T5 DALI BR MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	81	2,989	64
0055492	IVY 2 3 x 28W 840 T5 DALI BR MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	74	5,861	69
0056007	IVY 2 4 x 14W 840 T5 DALI BR MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	79	3,887	63
0055493	IVY 2 4 x 28W 840 T5 DALI BR MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	75	7,920	71
Emergency 3 hour												
0056004	IVY 2 1 x 28W 840 T5 EB E3 BR MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	1 x 28	32	73	1,927	60
0056005	IVY 2 2 x 28W 840 T5 EB E3 BR MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	2 x 28	64	72	3,843	60
0056002	IVY 2 3 x 14W 840 T5 EB E3 BR MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	81	2,989	64
0055490	IVY 2 3 x 28W 840 T5 E3 BR MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	74	5,861	69
0056003	IVY 2 4 x 14W 840 T5 EB E3 BR MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	79	3,887	63
0055491	IVY 2 4 x 28W 840 T5 E3 BR MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	75	7,920	71
DALI dimmable & Emergency 3 hour												
0056012	IVY 2 1 x 28W 840 T5 DALI E3 BR MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	1 x 28	32	73	1,927	60
0056013	IVY 2 2 x 28W 840 T5 DALI E3 BR MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	2 x 28	64	72	3,843	60
0056010	IVY 2 3 x 14W 840 T5 DALI E3 BR MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	81	2,989	64
0055494	IVY 2 3 x 28W 840 T5 DALI E3 BR MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	74	5,861	69
0056011	IVY 2 4 x 14W 840 T5 DALI E3 BR MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	79	3,887	63
0055495	IVY 2 4 x 28W 840 T5 DALI E3 BR MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	75	7,920	71

Legend: BR = Bright louvre; EB = Electronic Ballast; 1-10V = Analogue 1-10V dimmable; DALI = DALI dimmable; E3; = Emergency 3 hour; UGR19 = Meets office compliance; ASY = ASYmmetric; 840 = 4,000K T5 lamp; 830 = 3,000K T5 lamp

Bright louvre - 4-Lamp



Bright louvre - 3-Lamp




Bright louvre - 2-Lamp




Bright louvre - 1-Lamp




Bright louvre - 1 x 28W - 4,000K




Bright louvre - 2 x 28W - 4,000K




Bright louvre - 3 x 14W - 4,000K




Bright louvre - 3 x 28W - 4,000K



Bright louvre - 4 x 14W - 4,000K



Bright louvre - 4 x 28W - 4,000K




IVY 2 - RECESSED LUMINAIRE

Satin louvre

Satin louvre

Item number	Description	Connector	Colour name	Colour temp. (K)	Sylvania lamp description	Sylvania lamp item code	Energy class	Lamp package (W)	System Power consumption (W)	LOR (%)	Luminaire lumen Output (lm)	Efficacy (lm/W)
Electronic ballast												
0056036	IVY 2 1 x 28W 830 T5 EB SA WIEL	Wieland	Warm white	3,000	FHE 28W/T5/830	0002882	A+	1 x 28	32	69	1,821	57
0055523	IVY 2 1 x 28 830 T5 EB SA UGR19 MPM	MPM	Warm White	3,000	FHE 28W/T5/830	0002882	A+	1 x 28	32	61	1,466	46
0056037	IVY 2 2 x 28W 830 T5 EB SA WIEL	Wieland	Warm white	3,000	FHE 28W/T5/830	0002882	A+	2 x 28	64	68	3,566	58
0055524	IVY 2 2 x 28 830 T5 EB SA UGR19 MPM	MPM	Warm White	3,000	FHE 28W/T5/830	0002882	A+	2 x 28	64	61	2,931	46
0056034	IVY 2 3 x 14W 830 T5 EB SA WIEL	Wieland	Warm white	3,000	FHE 14W/T5/830	0002870	A+	3 x 14	47	72	2,663	58
0055525	IVY 2 3 x 14 830 T5 EB SA UGR19 MPM	MPM	Warm White	3,000	FHE 14W/T5/830	0002870	A+	3 x 14	47	70	2,158	46
0056035	IVY 2 4 x 14W 830 T5 EB SA WIEL	Wieland	Warm white	3,000	FHE 14W/T5/830	0002870	A+	4 x 14	62	71	3,494	58
0055526	IVY 2 4 x 14 830 T5 EB SA UGR19 MPM	MPM	Warm White	3,000	FHE 14W/T5/830	0002870	A+	4 x 14	62	71	3,057	49
0056038	IVY 2 1 x 28W 830 T5 EB SA ASY WIEL	Wieland	Warm white	3,000	FHE 28W/T5/830	0002882	A+	1 x 28	32	95	2,508	78
0056001	IVY 2 1 x 28W 840 T5 EB SA MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	1 x 28	32	69	1,821	57
0055749	IVY 2 2 X 28W 840 T5 EB SA MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	2 x 28	64	68	3,566	58
0055747	IVY 2 3 x 14W 840 T5 EB SA MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	72	2,663	58
0055496	IVY 2 3 x 28W 840 T5 EB SA MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	5,354	63
0055748	IVY 2 4 x 14W 840 T5 EB SA MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	71	3,494	58
0055497	IVY 2 4 x 28W 840 T5 EB SA MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	70	7,392	67
0055767	IVY 2 1 X 28W 840 T5 EB SA ASY MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	1 x 28	32	95	2,508	78
0056068	IVY 2 3 x 14W 840 625 EB SA MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	72	2,663	58
0056069	IVY 2 4 x 14W 840 625 EB SA MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	71	3,494	58
Analogue 1-10V dimmable												
0056041	IVY 2 1 x 28W 830 T5 DB10 SA WIEL	Wieland	Warm white	3,000	FHE 28W/T5/830	0002882	A+	1 x 28	32	69	1,821	57
0055527	IVY 2 1 x 28 830 T5 1-10 SA UGR19 MPM	MPM	Warm White	3,000	FHE 28W/T5/830	0002882	A+	1 x 28	32	61	1,466	46
0056042	IVY 2 2 x 28W 830 T5 DB10 SA WIEL	Wieland	Warm white	3,000	FHE 28W/T5/830	0002882	A+	2 x 28	64	68	3,566	58
0055528	IVY 2 2 x 28 830 T5 1-10 SA UGR19 MPM	MPM	Warm White	3,000	FHE 28W/T5/830	0002882	A+	2 x 28	64	61	2,931	46
0056039	IVY 2 3 x 14W 830 T5 DB10 SA WIEL	Wieland	Warm white	3,000	FHE 14W/T5/830	0002870	A+	3 x 14	47	72	2,663	58
0055529	IVY 2 3 x 14 830 T5 1-10 SA UGR19 MPM	MPM	Warm White	3,000	FHE 14W/T5/830	0002870	A+	3 x 14	47	70	2,158	46
0056040	IVY 2 4 x 14W 830 T5 DB10 SA WIEL	Wieland	Warm white	3,000	FHE 14W/T5/830	0002870	A+	4 x 14	62	71	3,494	58
0055530	IVY 2 4 x 14 830 T5 1-10 SA UGR19 MPM	MPM	Warm White	3,000	FHE 14W/T5/830	0002870	A+	4 x 14	62	71	3,057	49
DALI dimmable												
0056020	IVY 2 1 x 28W 840 T5 DALI SA MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	1 x 28	32	69	1,821	63
0056021	IVY 2 2 x 28W 840 T5 DALI SA MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	2 x 28	64	68	3,566	58
0056018	IVY 2 3 x 14W 840 T5 DALI SA MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	72	2,663	58
0055500	IVY 2 3 x 28W 840 T5 DALI SA MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	5,354	63
0056019	IVY 2 4 x 14W 840 T5 DALI SA MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	71	3,494	58
0055501	IVY 2 4 x 28W 840 T5 DALI SA MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	70	7,392	67
Emergency 3 hour												
0056016	IVY 2 1 x 28W 840 T5 EB E3 SA MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	1 x 28	32	69	1,821	57
0056017	IVY 2 2 x 28W 840 T5 EB E3 SA MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	2 x 28	64	68	3,566	58
0056014	IVY 2 3 x 14W 840 T5 EB E3 SA MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	72	2,663	58
0055498	IVY 2 3 x 28W 840 T5 E3 SA MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	5,354	63
0056015	IVY 2 4 x 14W 840 T5 EB E3 SA MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	71	3,494	58
0055499	IVY 2 4 x 28W 840 T5 E3 SA MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	70	7,392	67
DALI dimmable & Emergency 3 hour												
0056024	IVY 2 1 x 28W 840 T5 DALI E3 SA MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	1 x 28	32	69	1,821	57
0056025	IVY 2 2 x 28W 840 T5 DALI E3 SA MPM	MPM	Neutral white	4,000	FHE 28W/T5/840	0002883	A+	2 x 28	64	68	3,566	58
0056022	IVY 2 3 x 14W 840 T5 DALI E3 SA MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	72	2,663	58
0055502	IVY 2 3 x 28W 840 T5 DALI E3 SA MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	5,354	63
0056023	IVY 2 4 x 14W 840 T5 DALI E3 SA MPM	MPM	Neutral white	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	71	3,494	58
0055503	IVY 2 3 x 28W 840 T5 DALI E3 SA MPM	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	70	7,392	67

Legend: SA = Satin louvre; EB = Electronic Ballast; DALI = DALI dimmable; E3 = Emergency 3 hour; UGR19 = Meets office compliance; ASY = ASYmmetric; 840 = 4,000K T5 lamp; 830 = 3,000K T5 lamp

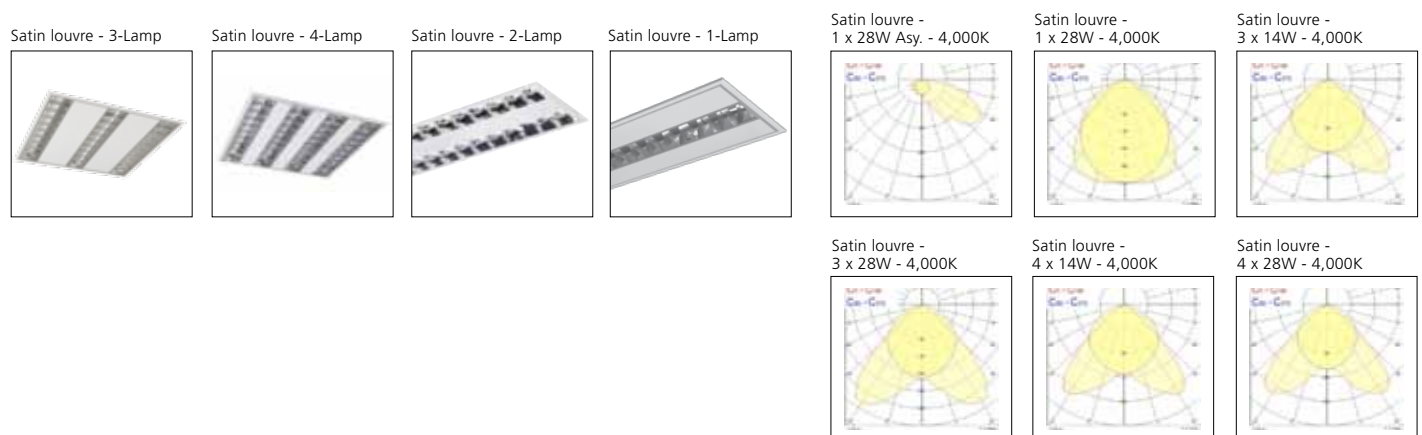


IVY 2 - SURFACE LUMINAIRE


Prismatic optic

IVY 2 - SURFACE - FEATURES

- 14W & 28W T5 surface luminaire
- Available in Mirror bright, Satin bright louvres and Prismatic Optic option
- Available in single, twin, three-way or four-way T5 versions (supplied with Sylvania T5 lamps)
- Achieves 81% LOR using the 3 x 14W lamp package (Bright Louvre)
- High light: up to 7,920lm (luminaire output on Bright Louvre 4 x 28W 4,000K version)
- High efficiency: up to 69lm/W (total system efficiency on Bright louvre 3 x 14W 4,000K)
- Available in Warm white (3,000K) and Neutral white (4,000K)
- Energy efficient electronic gear including DALI and 3 hour emergency versions as standard
- Easy access terminal block for quick installation
- Retained and hinged louvre for easy and safe lamp changing
- Complete with protective film, tubes and quick connector for easy installation



Dimension (mm)

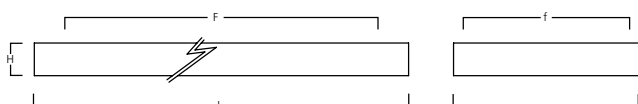

Lamp	L	l	E	e	F	f	H
Dimensions 600 x 600mm modules (mm)							
3 x 14W PO	596	596	574	574	500	265	82
4 x 14W PO	596	596	574	574	500	265	82
3 x 14W BR / SA	596	596	574	574	500	265	52
4 x 14W BR / SA	596	596	574	574	500	265	52
Dimensions 1200 x 300mm modules (mm)							
1 x 28W BR / SA	1,196	296	1,174	274	1,086	100	52
2 x 28W BR / SA	1,196	296	1,174	274	1,086	100	52
Dimensions 1200 x 600mm modules (mm)							
3 x 28W PO	1,196	596	1,174	574	1,086	100	82
4 x 28W PO	1,196	596	1,174	574	1,086	100	82
3 x 28W BR / SA	1,196	596	1,174	574	1,086	100	55
4 x 28W BR / SA	1,196	596	1,174	574	1,086	100	55

Prismatic Optic IP44


Item number	Description	Connector	Colour name	Colour temp. (K)	Sylvania lamp description	Sylvania lamp item code	Energy class	Lamp package (W)	System Power consumption (W)	LOR (%)	Luminaire lumen Output (lm)	Efficacy (lm/W)
Electronic ballast												
0050836	IVY 2 3 x 14W 840 T5 EB PO IP44 SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	77	2,453	52
0050860	IVY 2 3 x 28W 840 T5 EB PO IP44 SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	4,849	57
0050837	IVY 2 4 x 14W 840 T5 EB PO IP44 SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	76	3,240	52
0050861	IVY 2 4 x 28W 840 T5 EB PO IP44 SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	68	6,465	58
DALI dimmable												
0050840	IVY 2 3 x 14W 840 T5 DALI PO IP44 SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	77	2,453	52
0050864	IVY 2 3 x 28W 840 T5 DALI PO IP44 SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	4,849	57
0050841	IVY 2 4 x 14W 840 T5 DALI PO IP44 SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	76	3,240	52
0050865	IVY 2 4 x 28W 840 T5 DALI PO IP44 SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	68	6,465	58
Emergency 3 hour												
0050838	IVY 2 3 x 14W 840 T5 EB E3 PO IP44 SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	77	2,453	52
0050862	IVY 2 3 x 28W 840 T5 EB E3 PO IP44 SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	4,849	57
0050839	IVY 2 4 x 14W 840 T5 EB E3 PO IP44 SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	76	3,240	52
0050863	IVY 2 4 x 28W 840 T5 EB E3 PO IP44 SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	68	6,465	58
DALI dimmable & Emergency 3 hour												
0050842	IVY 2 3 x 14W 840 T5 DALI E3 PO IP44 SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	77	2,453	52
0050866	IVY 2 3 x 28W 840 T5 DALI E3 PO IP44 SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	4,849	57
0050843	IVY 2 4 x 14W 840 T5 DALI E3 PO IP44 SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	76	3,240	52
0050867	IVY 2 4 x 28W 840 T5 DALI E3 PO IP44 SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	68	6,465	58

Legend: PO = Prismatic optic; EB = Electronic Ballast; DALI = DALI dimmable; E3 = Emergency 3 hour; 840 = 4,000K T5 lamp; SURF = SURFace mounted


Surface Prismatic Optic




Prismatic Optic - 3 x 14W 4,000K




Prismatic Optic - 3 x 28W 4,000K



Prismatic Optic - 4 x 14W 4,000K



Prismatic Optic - 4 x 28W 4,000K



IVY 2 - SURFACE LUMINAIRE


Bright louvre & Satin louvre

Bright louvre


Item number	Description	Connector	Colour name	Colour temp. (K)	Sylvania lamp description	Sylvania lamp item code	Energy class	Lamp package (W)	System Power consumption (W)	LOR (%)	Luminaire lumen Output (lm)	Efficacy (lm/W)
Electronic ballast												
0050820	IVY 2 3 x 14W 840 T5 EB BR SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	81	2,989	64
0050844	IVY 2 3 x 28W 840 T5 EB BR SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	74	5,861	69
0050821	IVY 2 4 x 14W 840 T5 EB BR SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	79	3,887	63
0050845	IVY 2 4 x 28W 840 T5 EB BR SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	75	7,920	71
DALI dimmable												
0050824	IVY 2 3 x 14W 840 T5 DALI BR SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	81	2,989	64
0050848	IVY 2 3 x 28W 840 T5 DALI BR SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	74	5,861	69
0050825	IVY 2 4 x 14W 840 T5 DALI BR SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	79	3,887	63
0050849	IVY 2 4 x 28W 840 T5 DALI BR SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	75	7,920	71
Emergency 3 hour												
0050822	IVY 2 3 x 14W 840 T5 EB E3 BR SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	81	2,989	64
0050846	IVY 2 3 x 28W 840 T5 EB E3 BR SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	74	5,861	69
0050823	IVY 2 4 x 14W 840 T5 EB E3 BR SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	79	3,887	63
0050847	IVY 2 4 x 28W 840 T5 EB E3 BR SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	75	7,920	71
DALI dimmable & Emergency 3 hour												
0050826	IVY 2 3 x 14W 840 T5 DALI E3 BR SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	81	2,989	64
0050850	IVY 2 3 x 28W 840 T5 DALI E3 BR SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	74	5,861	69
0050827	IVY 2 4 x 14W 840 T5 DALI E3 BR SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	79	3,887	63
0050851	IVY 2 4 x 28W 840 T5 DALI E3 BR SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	75	7,920	71

Legend: BR = Bright louvre; EB = Electronic Ballast; DALI = DALI dimmable; E3 = Emergency 3 hour; 840 = 4,000K T5 lamp; SURF = SURface mounted


Surface Bright louvre

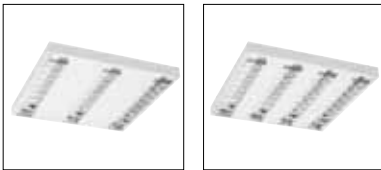


Bright louvre - 3 x 14W - 4,000K




Bright louvre - 3 x 28W 4,000K



Bright louvre - 4 x 14W 4,000K



Bright louvre - 4 x 28W 4,000K




Satin louvre

Item number	Description	Connector	Colour name	Colour temp. (K)	Sylvania lamp description	Sylvania lamp item code	Energy class	Lamp package (W)	System Power consumption (W)	LOR (%)	Luminaire lumen Output (lm)	Efficacy (lm/W)
Electronic ballast												
0050828	IVY 2 3 x 14W 840 T5 EB SA SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	72	2,663	57
0050852	IVY 2 3 x 28W 840 T5 EB SA SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	5,354	63
0050829	IVY 2 4 x 14W 840 T5 EB SA SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	71	3,494	56
0050853	IVY 2 4 x 28W 840 T5 EB SA SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	70	7,392	67
DALI dimmable												
0050832	IVY 2 3 x 14W 840 T5 DALI SA SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	72	2,663	57
0050856	IVY 2 3 x 28W 840 T5 DALI SA SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	5,354	63
0050833	IVY 2 4 x 14W 840 T5 DALI SA SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	71	3,494	56
0050857	IVY 2 4 x 28W 840 T5 DALI SA SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	70	7,392	67
Emergency 3 hour												
0050830	IVY 2 3 x 14W 840 T5 EB E3 SA SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	72	2,663	57
0050854	IVY 2 3 x 28W 840 T5 EB E3 SA SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	5,354	63
0050831	IVY 2 4 x 14W 840 T5 EB E3 SA SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	71	3,494	56
0050855	IVY 2 4 x 28W 840 T5 EB E3 SA SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	70	7,392	67
DALI dimmable & Emergency 3 hour												
0050834	IVY 2 3 x 14W 840 T5 DALI E3 SA SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	3 x 14	47	72	2,663	57
0050858	IVY 2 3 x 28W 840 T5 DALI E3 SA SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	3 x 28	85	68	5,354	63
0050835	IVY 2 4 x 14W 840 T5 DALI E3 SA SURF	MPM	Neutral White	4,000	FHE 14W/T5/840	0002871	A+	4 x 14	62	71	3,494	56
0050859	IVY 2 4 x 28W 840 T5 DALI E3 SA SURF	MPM	Neutral White	4,000	FHE 28W/T5/840	0002883	A+	4 x 28	111	70	7,392	67

Legend: SA = Satin louvre; EB = Electronic Ballast; DALI = DALI dimmable; E3 = Emergency 3 hour; 840 = 4,000K T5 lamp; SURF = SURface mounted

Surface Satin louvre

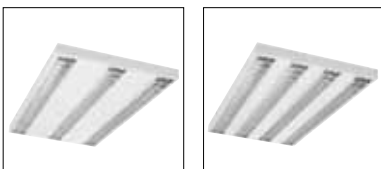

Satin louvre - 3 x 14W 4,000K



Satin louvre - 3 x 28W 4,000K



Satin louvre - 4 x 14W 4,000K



Satin louvre - 4 x 28W 4,000K

