


DeltaWing LED - DALI dimmable & Microwave sensor

DELTAWING LED51 DALI MW 4K 1200
0044897



Product features

- Low profile surface and suspended LED diffuser luminaire, 1218mm x 200mm, 4000K Neutral White, DALI dimmable, Microwave sensor, 5144lm, 50W, lifespan: 55,000 hours L90B10, A++ A+ A

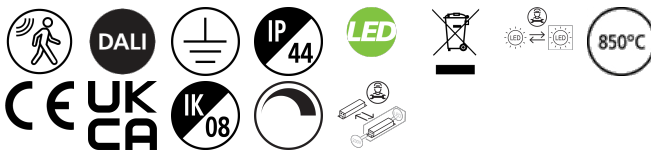


PRODUCT OVERVIEW

| | |
|-----------------------------|--|
| Product name | DELTAWING LED51 DALI MW 4K 1200 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling surface mounting, Suspended |
| Environment | Internal |
| General application | Education, Hospitality, Logistics & Industry, Office, Retail |
| ETIM Class | EC002892 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 5144 |
| Luminaire efficacy (lm/W) | 102.88 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Beam Angle (°) | 103 |
| Glare control | < 23 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 50 |
| Product Voltage (V) | 240 |
| Electrical protection | Class I |
| Control gear type | Electronic ballast |
| Dimmable | Yes |
| Minimum dimming level (%) | 95 |
| Housing colour | White |
| IP rating | IP44 |
| IK rating | IK08 |
| Product EAN number | 5410288448978 |

PHOTOMETRY

DeltaWing LED - DALI dimmable & Microwave sensor DELTAWING LED51 DALI MW 4K 1200 0044897

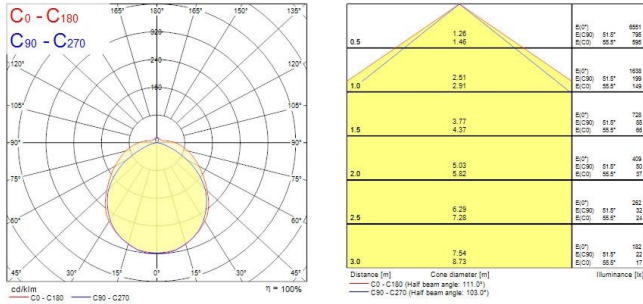

TECHNICAL DRAWINGS

