

## Beacon LED XL - High Output

### BEACON XL 85CRI 3K WIDE BEAM L3 WHITE

#### 2059717



#### Product features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 50° wide beam, optics: Polycarbonate lens, colour temperature: 3000K warm white, total system power: 33W, total fixture output: 3479lm, luminaire efficacy: 105lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 800mA, electronic driver, non-dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø113x165x205mm, weight: 1.66kg.



#### PRODUCT OVERVIEW

Product name	BEACON XL 85CRI 3K WIDE BEAM L3 WHITE
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
E-number FI	4280877
E-number SE	7401258
Warranty	5 years
Fixture luminous flux (lm)	3479
Luminaire efficacy (lm/W)	105
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	33
Product Voltage (V)	240
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597178

#### DATA TABLE

## Beacon LED XL - High Output

*BEACON XL 85CRI 3K WIDE BEAM L3 WHITE*  
2059717

### General data

Product name	BEACON XL 85CRI 3K WIDE BEAM L3 WHITE
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4280877
E-number SE	7401258
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	3479
Luminaire efficacy (lm/W)	105
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	50
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	33
Mains voltage (V)	220-240V~
Product Voltage (V)	240
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Transformer required	Yes
Drive current (mA)	800
Inrush Current (A)	30
Inrush Duration (µs)	200
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	12
Max. Luminaires per 16A C Breaker	20
Max. Luminaires per 10A B Breaker	12
Max. Luminaires per 16A B Breaker	20

### Lifetime data

Lifespan L70 B50	72000
Lifespan L80 B20	72000
Lifespan L90 B10	33000

## Beacon LED XL - High Output

*BEACON XL 85CRI 3K WIDE BEAM L3 WHITE*  
2059717


### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	85
Nominal Product Width (mm)	165
Nominal Product Height (mm)	205
Nominal Product Diameter (mm)	113
Weight (kg)	1.365

### Packaging

Single packaging type	Carton
Product EAN number	5025768597178
Packaging single length / height (cm)	25.0
Packaging single width (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (outer)	05025768597178
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0

## PHOTOMETRY

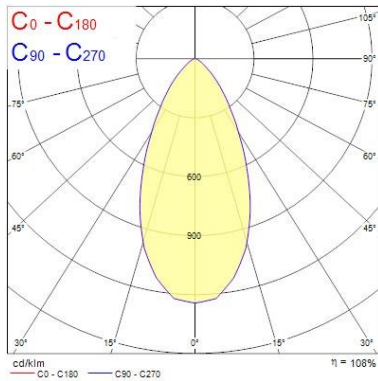

Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C0) [lx]
0.5	0.47	17301	6447
1.0	0.94	4325	1612
1.5	1.41	1922	716
2.0	1.87	1081	403
2.5	2.34	692	256
3.0	2.81	481	179

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 50.2°)

## TECHNICAL DRAWINGS

