


Beacon LED XXL - High Output

BEACON XXL MB HO 4K L3 BLK
2059313



Product features

- 2059313 BEACON XXL MB HO 4K L3 BLK Integrated LED spotlight, black RAL 9005, compact and minimalist design, ideal for double height spaces, retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 50° medium beam, optics: Silicone lens for controlled beam, colour temperature: 4000K neutral white, total system power: 48W, total fixture output: 4884lm, luminaire efficacy: 102lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, non-dimmable, switched only, power factor: 0.98 electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, lockable positioning using Allen key, ...

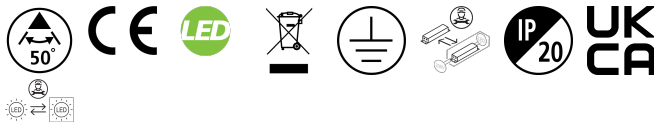


PRODUCT OVERVIEW

Product name	BEACON XXL MB HO 4K L3 BLK
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Retail
ETIM Class	EC001744
E-number FI	4278869
E-number SE	7401270
Warranty	5 years
Fixture luminous flux (lm)	4884
Luminaire efficacy (lm/W)	101.75
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	48
Product Voltage (V)	240
Electrical protection	Class I
Control gear type	Electronic ballast
Housing colour	Black
IP rating	IP20
Product EAN number	5025768593132

PHOTOMETRY

Beacon LED XXL - High Output BEACON XXL MB HO 4K L3 BLK 2059313



Distance [m]	Cone diameter [m]	E _{0%} [lx]	E _{50%} [lx]	E _{90%} [lx]
0.5	0.46	1918	24.8°	714
1.0	0.92	476	24.8°	175
1.5	1.39	212	24.8°	90
2.0	1.85	108	24.8°	48
2.5	2.31	70	24.8°	32
3.0	2.77	53	24.8°	25

Distance [m] Cone diameter [m]
C0-C180 (Half beam angle: 49.6°)

TECHNICAL DRAWINGS

