

## Expospot 90 cardan square - Sylvania

EXPOSPOT 90 DUO HO RA80 4000K NB WHITE  
0060363



### Product features

- Integrated LED double gimbal accent downlight, duo head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 26°, optics: aluminium reflector and lens combination, colour temperature: 4000K neutral white, total system power: 73W, total fixture output: 2x4121lm, 113lm/W, LOR: 100%, colour rendering: Ra 80 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 70% of the original output (L70B50), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 148x292mm, dimensions: 163x307x104mm, weight: 2.1kg.



### PRODUCT OVERVIEW

Product name	EXPOSPOT 90 DUO HO RA80 4000K NB WHITE
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	2 x 4121
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	26
Photobiological Risk Group	RG1
Total power consumption (W)	73
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288603636

### DATA TABLE

#### General data

Product name	EXPOSPOT 90 DUO HO RA80 4000K NB WHITE
--------------	--

## Expospot 90 cardan square - Sylvania EXPOSPOT 90 DUO HO RA80 4000K NB WHITE 0060363

Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	2 x 4121
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	26
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	73
Mains voltage (V)	230-240V~
Lamp power factor	0.94
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Drive current (mA)	900
Inrush Current (A)	38.8
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	10
Max. Luminaires per 13A C Breaker	14
Max. Luminaires per 16A C Breaker	17
Max. Luminaires per 20A C Breaker	22
Max. Luminaires per 10A B Breaker	6
Max. Luminaires per 13A B Breaker	8
Max. Luminaires per 16A B Breaker	10
Max. Luminaires per 20A B Breaker	13

### Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B20	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B20	60000

## Expospot 90 cardan square - Sylvania EXPOSPOT 90 DUO HO RA80 4000K NB WHITE 0060363

Lifespan L80 B10	60000
Lifespan L90 B50	60000
Lifespan L90 B20	60000
Lifespan L90 B10	55000



### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	307
Nominal Product Width (mm)	163
Nominal Product Height (mm)	104
Cutout Dimensions (W x L in mm or Diameter in mm)	148x292
Weight (kg)	2.1
Recessed Depth (mm)	104

### Packaging

Single packaging type	Carton
Product EAN number	5410288603636
Packaging single length / height (cm)	50.0
Packaging single width (cm)	30.0
Packaging single depth (cm)	20.0
DUN14 (outer)	05410288603636
Units per outer package	1
Packaging outer length / height (cm)	50.0
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	20.0

## PHOTOMETRY

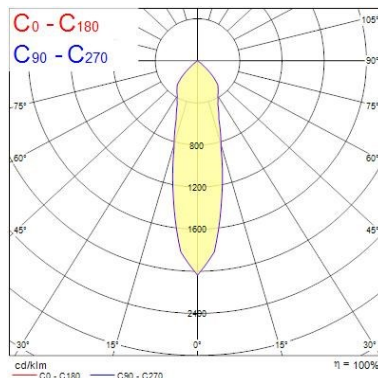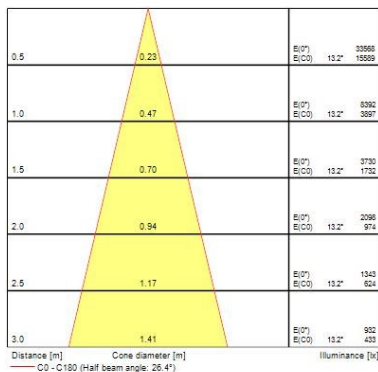

## TECHNICAL DRAWINGS

## Expospot 90 cardan square - Sylvania *EXPOSPOT 90 DUO HO RA80 4000K NB WHITE* 0060363

