


Expospot 90 cardan square - Sylvania

EXPOSPOT 90 TRIO HE RA80 4000K NB WHITE
0060318



Product features

- Integrated LED triple gimbal accent downlight, trio head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 29°, optics: aluminium reflector and lens combination, colour temperature: 4000K neutral white, total system power: 77W, total fixture output: 3x3145lm, 123lm/W, LOR: 100%, colour rendering: Ra 80 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 70% of the original output (L70B50), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 148x422mm, dimensions: 163x437x104mm, weight: 2.75kg.

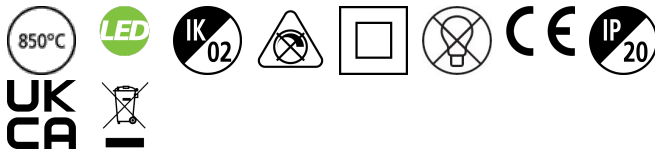


PRODUCT OVERVIEW

Product name	EXPOSPOT 90 TRIO HE RA80 4000K NB WHITE
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	3 x 3145
Luminaire efficacy (lm/W)	123
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	29
Photobiological Risk Group	RG1
Total power consumption (W)	77
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288603186

PHOTOMETRY

Expospot 90 cardan square - Sylvania EXPOSPOT 90 TRIO HE RA80 4000K NB WHITE 0060318



0.5	0.26	E(0°) E(C0)	14.8°	2776 1819
1.0	0.52	E(0°) E(C0)	14.8°	616 310
1.5	0.78	E(0°) E(C0)	14.8°	397 164
2.0	1.04	E(0°) E(C0)	14.8°	198 99
2.5	1.30	E(0°) E(C0)	14.8°	83 37
3.0	1.56	E(0°) E(C0)	14.8°	37 16

Distance [m] Cone diameter [m] Illuminance [lx]

C0 - C180 (Half beam angle: 23.2°)

TECHNICAL DRAWINGS

