

START DOWNLIGHT IP44 225


START Downlight 225 IP44 DALI 2325Lm 830

0030338



Product features

- Ceiling recessed LED downlight IP44 (from the front), with only 65mm product depth and 225mm cutout. Supplied with DALI Tridonic push dim driver with loop in - out option (2800671). Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 2325LM, 23W, 101lm/W, 3000K, Driver Current: 650mA, CRI80, 74° beam angle, IP44 from the front, IK07, (HxW) 65x225mm, Class 2, 220-240V

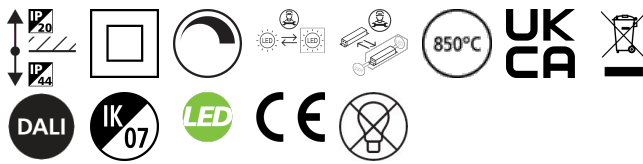

PRODUCT OVERVIEW

Product name	START Downlight 225 IP44 DALI 2325Lm 830
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278167
Warranty	5 years
Fixture luminous flux (lm)	2275
Luminous flux (lm)	2325
Luminaire efficacy (lm/W)	95
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	23
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303383

DATA TABLE

START DOWNLIGHT IP44 225

START Downlight 225 IP44 DALI 2325Lm 830

0030338

General data

Product name	START Downlight 225 IP44 DALI 2325Lm 830
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4278167
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2275
Luminous flux (lm)	2325
Luminaire efficacy (lm/W)	95
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	23
Mains voltage (V)	220-240V~
Lamp power factor	0.96
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Drive current (mA)	650
Inrush Current (A)	25
Inrush Duration (µs)	140
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	31
Max. Luminaires per 13A C Breaker	40
Max. Luminaires per 16A C Breaker	51
Max. Luminaires per 20A C Breaker	66

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	74000

START DOWNLIGHT IP44 225

START Downlight 225 IP44 DALI 2325Lm 830

0030338

Lifespan L90 B10	34000
------------------	-------


Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Length (mm)	240
Nominal Product Width (mm)	240
Nominal Product Height (mm)	65
Nominal Product Diameter (mm)	240
Cutout Dimensions (W x L in mm or Diameter in mm)	225
Weight (kg)	0.56
Recessed Depth (mm)	150

Packaging

Single packaging type	Carton
Product EAN number	5410288303383
Packaging single length / height (cm)	25.8
Packaging single width (cm)	25.8
Packaging single depth (cm)	10.0
DUN14 (outer)	15410288303380
Units per outer package	12
Packaging outer length / height (cm)	53.0
Packaging outer width (cm)	53.0
Packaging outer depth (cm)	32.5

PHOTOMETRY

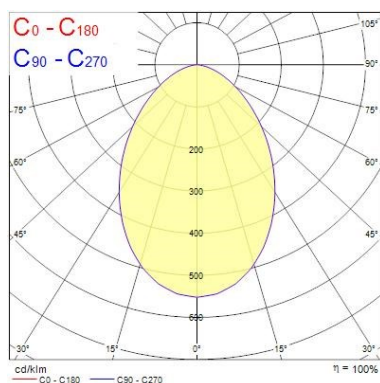

Distance [m]	Cone diameter [m]	E ₀ [lx]	E ₁ [lx]
0.5	0.82	5038	1188
1.0	1.64	1267	292
1.5	2.46	559	130
2.0	3.27	314	73
2.5	4.09	201	47
3.0	4.91	140	32

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 78.6°) Illuminance [lx]

TECHNICAL DRAWINGS

START DOWNLIGHT IP44 225

START Downlight 225 IP44 DALI 2325Lm 830
0030338

