

## START DOWNLIGHT IP44 225


START Downlight 225 IP44 DALI 2325Lm 830

0030338



### Product features

- Ceiling recessed LED downlight IP44 (from the front), with only 65mm product depth and 225mm cutout. Supplied with DALI Tridonic push dim driver with loop in - out option (2800671). Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 2325LM, 23W, 101lm/W, 3000K, Driver Current: 650mA, CRI80, 74° beam angle, IP44 from the front, IK07, (HxW) 65x225mm, Class 2, 220-240V

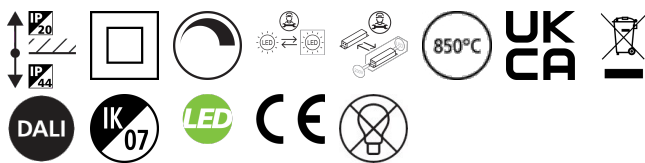


### PRODUCT OVERVIEW

Product name	START Downlight 225 IP44 DALI 2325Lm 830
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278167
Warranty	5 years
Fixture luminous flux (lm)	2275
Luminous flux (lm)	2325
Luminaire efficacy (lm/W)	95
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	23
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303383

### PHOTOMETRY

## START DOWNLIGHT IP44 225

*START Downlight 225 IP44 DALI 2325Lm 830*  
0030338



0.5	0.82	E(0°) E(C0)	39.3°	928 1168
1.0	1.64	E(0°) E(C0)	39.3°	127 262
1.5	2.46	E(0°) E(C0)	39.3°	89 152
2.0	3.27	E(0°) E(C0)	39.3°	74 73
2.5	4.09	E(0°) E(C0)	39.3°	61 47
3.0	4.91	E(0°) E(C0)	39.3°	52 35

Distance [m]    Cone diameter [m]    Illuminance [lx]  
C0 - C180 (Half beam angle 78.6°)

## TECHNICAL DRAWINGS

