


## DeltaWing LED - Electronic

DELTAWING LED40 EB 4K 1200  
0044871



### Product features

- Low profile surface and suspended LED diffuser luminaire, 1218mm x 200mm, 4000K Neutral White, Electronic, 4030lm, 36W, lifespan: 55,000 hours L90B10, A++ A+ A

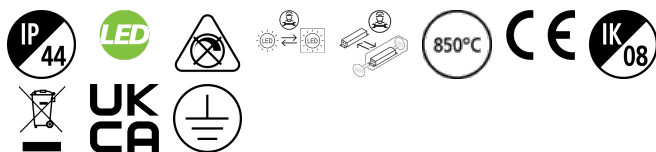

### PRODUCT OVERVIEW

Product name	DELTAWING LED40 EB 4K 1200
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Environment	Internal
General application	Education, Hospitality, Logistics & Industry, Office, Retail
ETIM Class	EC002892
E-number FI	4274305
E-number SE	7014019
Warranty	5 years
Fixture luminous flux (lm)	4030
Luminaire efficacy (lm/W)	111.94
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	103
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	36
Product Voltage (V)	240
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Minimum dimming level (%)	99
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK08
Product EAN number	5410288448718

## DeltaWing LED - Electronic

DELTAWING LED40 EB 4K 1200  
0044871

### DATA TABLE

#### General data

Product name	DELTAWING LED40 EB 4K 1200
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Environment	Internal
General application	Education, Hospitality, Logistics & Industry, Office, Retail
Operating temperature range (°C)	-10°C - 25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4274305
E-number SE	7014019
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	4030
Luminaire efficacy (lm/W)	111.94
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	103
Glare control	< 22
Photobiological Risk Group	RG1

#### Electrical data

Total power consumption (W)	36
Mains voltage (V)	220-240V~
Product Voltage (V)	240
Lamp power factor	0.95
Electrical protection	Class I
Control gear type	Electronic ballast
Transformer required	Yes
Dimmable	No
Minimum dimming level (%)	99
Drive current (mA)	350
Inrush Current (A)	15
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)

## DeltaWing LED - Electronic

*DELTAWING LED40 EB 4K 1200*  
0044871

Max. Luminaires per 10A C Breaker	40
Max. Luminaires per 13A C Breaker	51
Max. Luminaires per 16A C Breaker	63
Max. Luminaires per 20A C Breaker	80
Max. Luminaires per 10A B Breaker	24
Max. Luminaires per 13A B Breaker	31
Max. Luminaires per 16A B Breaker	38
Max. Luminaires per 20A B Breaker	48

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	55800

### Physical data

Housing colour	White
IP rating	IP44
IK rating	IK08
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1218
Nominal Product Width (mm)	200
Nominal Product Height (mm)	85
Weight (kg)	3.4

### Packaging

Single packaging type	Carton
Product EAN number	5410288448718
Packaging single length / height (cm)	122.0
Packaging single width (cm)	9.0
Packaging single depth (cm)	22.5
DUN14 (outer)	05410288448718
Units per outer package	1
Packaging outer length / height (cm)	122.0
Packaging outer width (cm)	9.0
Packaging outer depth (cm)	22.5

### Safety data

Optimal operating condition (°C)	-10-25
----------------------------------	--------

## PHOTOMETRY

## DeltaWing LED - Electronic


### DELTA WING LED40 EB 4K 1200

### 0044871

0.5	1.27 1.46	E(0°) E(C90) E(C0)	918 609 485
1.0	2.53 2.91	E(0°) E(C90) E(C0)	1279 152 115
1.5	3.80 4.37	E(0°) E(C90) E(C0)	568 68 52
2.0	5.06 5.82	E(0°) E(C90) E(C0)	320 38 29
2.5	6.33 7.28	E(0°) E(C90) E(C0)	205 24 19
3.0	7.60 8.73	E(0°) E(C90) E(C0)	142 17 13

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 111.0°)  
— C90 - C270 (Half beam angle: 100.4°)

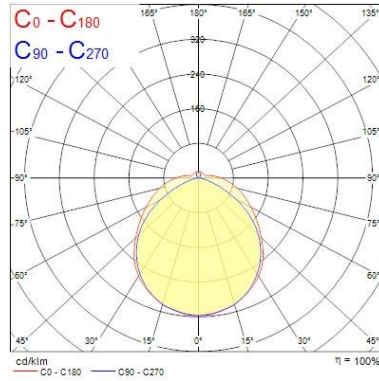

## TECHNICAL DRAWINGS

