

Brio IP65 LED

BRIO IP55 LED 4k DALI Emergency White
4054951



PRODUCT OVERVIEW

Product name	BRIO IP55 LED 4k DALI Emergency White
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Logistics & Industry, Museums & Galleries, Office
Colour temperature (K)	4000
Control gear mounting	Integral
Housing colour	White
IP rating	IP55
IK rating	IK10
Product EAN number	5026524549516

DATA TABLE

General data

Product name	BRIO IP55 LED 4k DALI Emergency White
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Logistics & Industry, Museums & Galleries, Office

Optical data

Colour temperature (K)	4000
Correlated colour temperature range (K)	4000 - 4000
Adjustable chromaticity	N
Distribution type	Symmetric
Emergency duration (h)	3

Electrical data

Mains voltage (V)	230V~
Control gear mounting	Integral
Transformer required	Yes
Drive current (mA)	350

Brio IP65 LED

BRIO IP55 LED 4k DALI Emergency White
4054951



Physical data

Housing colour	White
IP rating	IP55
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Length (mm)	408
Nominal Product Width (mm)	358
Weight (kg)	3.2

Packaging

Single packaging type	Carton
Product EAN number	5026524549516
Packaging single length / height (cm)	50.0
Packaging single width (cm)	50.0
Packaging single depth (cm)	20.0
Units per outer package	1
Packaging outer length / height (cm)	50.0
Packaging outer width (cm)	50.0
Packaging outer depth (cm)	20.0

PHOTOMETRY

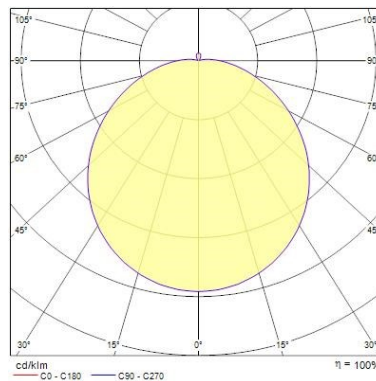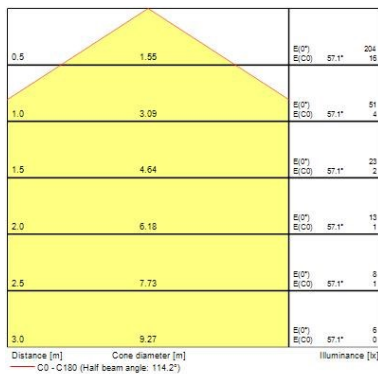

TECHNICAL DRAWINGS

