


DIMENSIONS (mm)

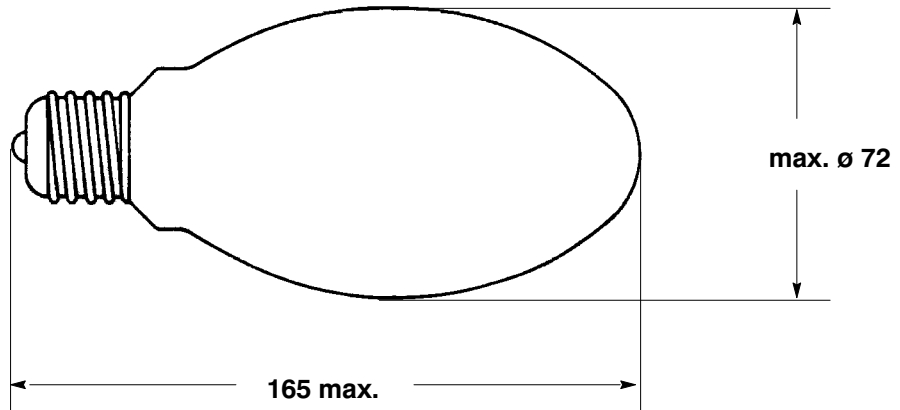

Cap : E27/27 (IEC 61-1)
Bulb : soft glass coated

ELECTRICAL DATA:		NOMINAL VALUE	MIN.	MAX.
Lamp Wattage	(W) :	50		
Lamp Voltage	(V) :	85	70	100
Lamp Current	(A) :	0.76		
Lamp Warm-up current	(A) :		0.76	1.52

OPERATING CONDITIONS:

Burning Position	:	any		
Ballast Type	:	SHP-50W/220V, 230V, 240V, 250V		
Voltage/Current ratio	:	246		
Calibration Current	(A) :	0.76		
Supply Voltage	(%) :		92	106
Ignitor Pulse	(kVp) :		1.8	2.5
Compensation Capacitor	(mF) :	8		
Cap Rim Temperature	(C) :			210
Bulb Temperature	(C) :			310

LAMP LIFE

Rated Average Life	(h) :	40000 (50 % survival rate)
T 90	(h) :	21000 (90 % survival rate)

PHOTOMETRIC DATA :

Initial Luminous Flux	(lm) :	3600
Luminous Efficacy	(lm/W) :	72
Correlated Colour Temperature	(K) :	2050
Colour Rendering Index	(class) :	4

ATTENTION : Lamps comply with the requirements of IEC publication 60662. Ballasts and ignitors must comply with IEC 60923 and 60927 respectively. Luminaires must be in accordance with IEC 60598-1 and 60598-2-3. Inspection is in accordance with IEC 60410.

Issued by : TIENEN
Date : 24.02.1995
Revision date : 21.04.2009

DATA SHEET

Specification No. : 45 09 050/F
Supersedes : 4509 050/E 01.10.2007
Page 1 of 1