


Myriad V IP65 Chrome Bezel

MYRIAD IP65 3000K PHASE DIM CHROME
2049527



Product features

- MYRIAD IP65 3000K PHASE DIM CHROME

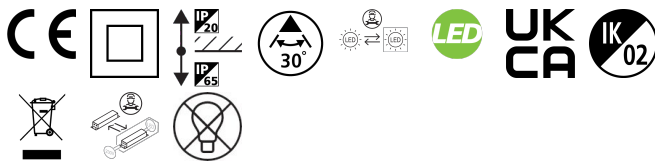

PRODUCT OVERVIEW

Product name	MYRIAD IP65 3000K PHASE DIM CHROME
Technology	LED
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	1069
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	30
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Other
Control gear mounting	Integral
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768495276

DATA TABLE

General data

Product name	MYRIAD IP65 3000K PHASE DIM CHROME
Technology	LED
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail

Myriad V IP65 Chrome Bezel

MYRIAD IP65 3000K PHASE DIM CHROME
2049527

ETIM Class	EC001744
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1069
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Symmetric

Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Other
Control gear mounting	Integral
Transformer required	Yes
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Physical data


IP rating	IP65/20
IK rating	IK02
Diffuser material	Glass
Nominal Product Length (mm)	76
Nominal Product Width (mm)	76
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	76
Cutout Dimensions (W x L in mm or Diameter in mm)	75
Weight (kg)	0.39
Recessed Depth (mm)	72

Packaging

Single packaging type	Carton
Product EAN number	5025768495276
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

Myriad V IP65 Chrome Bezel MYRIAD IP65 3000K PHASE DIM CHROME 2049527

PHOTOMETRY

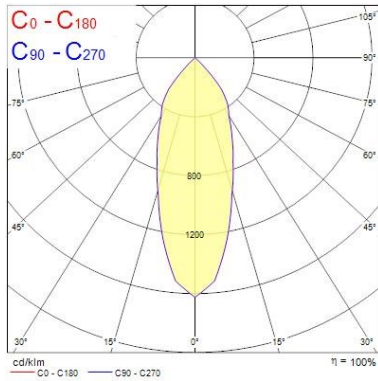

0.5	0.33	E _(0°) E _(C0)	18.5°	6948 2976
1.0	0.67	E _(0°) E _(C0)	18.5°	1737 744
1.5	1.00	E _(0°) E _(C0)	18.5°	772 331
2.0	1.34	E _(0°) E _(C0)	18.5°	434 186
2.5	1.67	E _(0°) E _(C0)	18.5°	278 119
3.0	2.01	E _(0°) E _(C0)	18.5°	195 85

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 37.0°) Illuminance [lx]

TECHNICAL DRAWINGS

