



High performance in a classic design

RefLED™ Retro PAR



The new RefLED™ Retro PAR range offers a combination of glass retro look, high lumen output and extremely long life. These new generation RefLED™ Retro PAR lamps are the ideal replacement of traditional PAR lamps and suitable for both general lighting and accent lighting applications.

RefLED™ Retro PAR



Features

- High performance LED PAR lamps with the same look and feel of traditional PAR lamps
- Glass construction - means no colours clashing between lamp and fixture
- Reduced visible heatsink from the front
- Up to 89% energy saving
- Mercury-free solution
- Lower maintenance cost
- Available in PAR16, PAR20, PAR30 and PAR38 shapes
- RefLED™ PAR38 is IP65 rated and is suitable for both indoor and outdoor application when used with correct luminaire
- Lifetime: up to 25,000 hours
- High lumen efficacy
- Dimmable on approved dimmers*
- 3 year warranty
- Suitable for general lighting and accent lighting in hotels, restaurants, bars, lobbies, corridors and halls

Product information

Code	Description	Voltage (V)	Power (W)	Luminous Flux (lm)	Efficiency (lm/W)	Beam Angle (°)	Luminous Intensity (cd)	Colour Temp (K)	CRI	Base	Life (hours)	Equivalent Wattage (W)	Dimmable (Y/N)	Energy Class	IP Rating	Packaging
RefLED™ Retro PAR16																
0028543	RefLED Retro PAR16 345LM 830 E14 36° SL	220-240	4.5	345	77	36	700	3000	80	E14	15,000	50	N	A+	IP20	6
0028544	RefLED Retro PAR16 345LM 830 E14 36° BL	220-240	4.5	345	77	36	700	3000	80	E14	15,000	50	N	A+	IP20	6
0028545	RefLED Retro PAR16 345LM 840 E14 36° SL	220-240	4.5	345	77	36	700	4000	80	E14	15,000	50	N	A+	IP20	6
0028586	RefLED Retro PAR16 345LM 840 E14 36° BL	220-240	4.5	345	77	36	700	4000	80	E14	15,000	50	N	A+	IP20	6
0028546	RefLED Retro PAR16 345LM 865 E14 36° SL	220-240	4.5	345	77	36	700	6500	80	E14	15,000	50	N	A+	IP20	6
RefLED™ Retro PAR20																
0028269	RefLED Retro PAR20 DIM 540lm 830 36°	220-240	8	540	68	36	1200	3000	80	E27	25,000	70	Y	A+	IP20	6
0028524	RefLED Retro PAR20 DIM 540LM 840 36° SL	220-240	8	540	68	36	1200	4000	80	E27	25,000	70	Y	A+	IP20	6
RefLED™ Retro PAR30																
0028270	RefLED Retro PAR30 DIM 820lm 830 36°	220-240	11	820	75	36	1900	3000	80	E27	25,000	95	Y	A+	IP20	6
0028525	RefLED Retro PAR30 DIM 820LM 840 36° SL	220-240	11	820	75	36	1900	4000	80	E27	25,000	95	Y	A+	IP20	6
RefLED™ Retro PAR38																
0028271	RefLED Retro PAR38 DIM 1200lm 830 IP65 40°	220-240	15	1200	80	40	2400	3000	80	E27	25,000	140	Y	A+	IP65	6
0028526	RefLED Retro PAR38 DIM 1200LM 840 IP65 40°SL	220-240	15	1200	80	40	2400	4000	80	E27	25,000	140	Y	A+	IP65	6

Additional Images




RefLED™ Retro PAR16

RefLED™ Retro PAR20

RefLED™ Retro PAR30

RefLED™ Retro PAR38

Dimensions (mm)

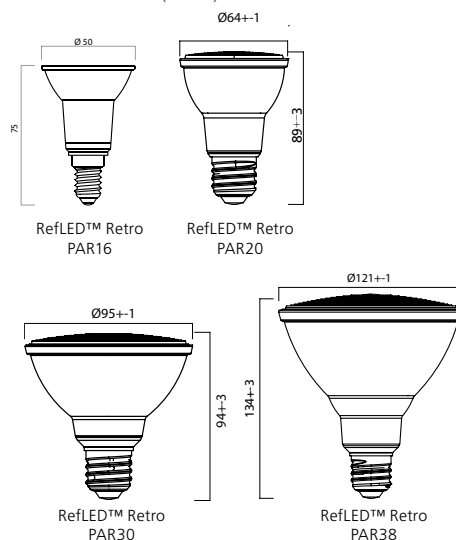

RefLED™ Retro PAR16

RefLED™ Retro PAR20

RefLED™ Retro PAR30

RefLED™ Retro PAR38

