

## Sylproof Tubular LED - Microwave sensor DALI

*Sylproof Tubular LED 1X1200 DALI MW NW*  
0047623



### Product features

- Aesthetically attractive and highly efficient LED tubular luminaire, opaque acrylic diffuser, stainless steel end caps and mounting brackets, rapid connector, as Sylvania Sylproof Tubular LED



### PRODUCT OVERVIEW

Product name	Sylproof Tubular LED 1X1200 DALI MW NW
Technology	LED
Cap/Base	N/A
Housing	Acrylic PMMA
Mount	Ceiling surface mounting
Environment	Interior
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	2734
Luminous flux (lm)	2734
Luminaire efficacy (lm/W)	106.79
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	25.6
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	90
Housing colour	Transparent
IP rating	IP66
IK rating	IK06
Product EAN number	5410288476230

### DATA TABLE

#### General data

Product name	Sylproof Tubular LED 1X1200 DALI MW NW
--------------	--

## Sylproof Tubular LED - Microwave sensor DALI

*Sylproof Tubular LED 1X1200 DALI MW NW*  
0047623

Technology	LED
Cap/Base	N/A
Housing	Acrylic PMMA
Mount	Ceiling surface mounting
Environment	Interior
General application	Logistics & Industry
Operating temperature range (°C)	-20°C - 25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	2734
Luminous flux (lm)	2734
Luminaire efficacy (lm/W)	106.79
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Distribution type	Direct
Photobiological Risk Group	RG0

### Electrical data

Total power consumption (W)	25.6
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Transformer required	Yes
Dimmable	Yes
Minimum dimming level (%)	90
Drive current (mA)	400
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	46

### Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B10	49000
Lifespan L90 B50	35000

### Physical data

Housing colour	Transparent
IP rating	IP66
IK rating	IK06

## Sylproof Tubular LED - Microwave sensor DALI

Sylproof Tubular LED 1X1200 DALI MW NW  
0047623

Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1300
Nominal Product Width (mm)	112
Nominal Product Height (mm)	112
Weight (kg)	2.9

### Packaging

Single packaging type	Carton
Product EAN number	5410288476230
Packaging single length / height (cm)	130.0
Packaging single width (cm)	13.0
Packaging single depth (cm)	13.0
DUN14 (outer)	05410288476230
Units per outer package	1
Packaging outer length / height (cm)	130.0
Packaging outer width (cm)	13.0
Packaging outer depth (cm)	13.0

### Safety data


Optimal operating condition (°C)	-20-25
----------------------------------	--------

## PHOTOMETRY

Distance [m]	Cone diameter [m]	E(I)°	E(C90)°	E(C0)°
0.5	1.17 1.50	3375	49.5°	460
1.0	2.34 3.00	844	49.5°	116
1.5	3.51 4.50	375	49.5°	51
2.0	4.68 6.00	211	49.5°	29
2.5	5.85 7.50	135	49.5°	19
3.0	7.03 9.00	94	49.5°	13

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 121.8°)  
— C90 - C270 (Half beam angle: 59.0°)

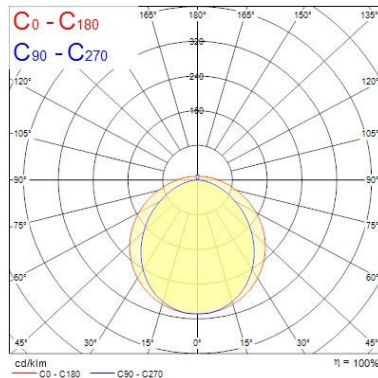

## TECHNICAL DRAWINGS

