

## Beacon LED Projector - Framing

*Beacon LED Framing Projector DALI 3000K Three Circuit Track - White*  
2055964



### Product features

- Beacon Projector offers precision light exactly where it is needed. The Framing Projector has four adjustable arms allowing the beam to be framed to the desired size shape (square/rectangle or irregular 4 sided shapes). High colour rendering CRI 97 typical. IR/UV free light source without heat radiation. LED technology provides an energy efficient solution with reduced maintenance costs. **IMPORTANT NOTE:** This fixture can only be used on the Lytespan DALI or Lytebeam DALI tracks !



### PRODUCT OVERVIEW

<b>Product name</b>	Beacon LED Framing Projector DALI 3000K Three Circuit Track - White
<b>Technology</b>	LED
<b>Housing</b>	Aluminium
<b>Mount</b>	Track mounting
<b>General application</b>	Hospitality, Museums & Galleries
<b>ETIM Class</b>	EC001744
<b>E-number FI</b>	4260890
<b>Warranty</b>	5 years
<b>Fixture luminous flux (lm)</b>	474
<b>Luminaire efficacy (lm/W)</b>	14
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	97
<b>Colour Variation Initial (SDCM)</b>	SDCM3
<b>Photobiological Risk Group</b>	RG1
<b>Total power consumption (W)</b>	35
<b>Product Voltage (V)</b>	240
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	Electronic ballast
<b>Control gear mounting</b>	Integral
<b>Dimmable</b>	Yes
<b>Housing colour</b>	RAL 9016 - Traffic white / Bezel
<b>IP rating</b>	IP20
<b>IK rating</b>	IK02
<b>Product EAN number</b>	5025768559640

### DATA TABLE

#### General data

<b>Product name</b>	Beacon LED Framing Projector DALI 3000K Three Circuit Track - White
---------------------	---

## Beacon LED Projector - Framing

*Beacon LED Framing Projector DALI 3000K Three Circuit Track - White*  
2055964

Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Hospitality, Museums & Galleries
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4260890
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	474
Luminaire efficacy (lm/W)	14
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	97
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Adjustable
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	35
Mains voltage (V)	230V~
Product Voltage (V)	240
Lamp power factor	0.95
Electrical protection	Class II
Control gear required	Yes
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	Yes
Drive current (mA)	900
Inrush Current (A)	30
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 16A B Breaker	20

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	89000
Lifespan L90 B10	33000

### Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	185
Nominal Product Height (mm)	215

## Beacon LED Projector - Framing


*Beacon LED Framing Projector DALI 3000K Three Circuit Track - White*  
**2055964**

**Weight (kg)** 1.365

### Packaging

Single packaging type	Carton
Product EAN number	5025768559640
Packaging single length / height (cm)	32.0
Packaging single width (cm)	15.5
Packaging single depth (cm)	13.0
DUN14 (outer)	05025768559640
Units per outer package	1
Packaging outer length / height (cm)	32.0
Packaging outer width (cm)	15.5
Packaging outer depth (cm)	13.0

## PHOTOMETRY

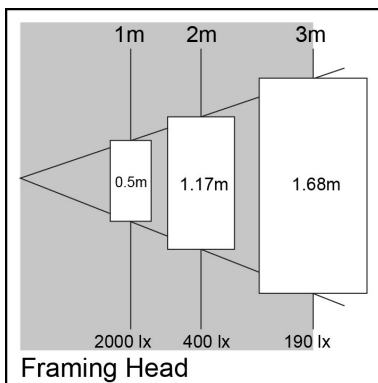

## TECHNICAL DRAWINGS

