

## Sylproof Superia LED G3 DALI

*SYLPROOF SUPERIA LED G3 600mm Twin 4K QC DALI*  
0048737



### Product features

- Sylproof Superia, integrated LED weatherproof luminaire with quick connector, UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. GRP housing, Polycarbonate diffuser, DALI dimmable, 4000K, CRI80, 2700 lm, 19 W, 140 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK08, IP65.



### PRODUCT OVERVIEW

Product name	SYLPROOF SUPERIA LED G3 600mm Twin 4K QC DALI
Technology	LED
Housing	Polyester
Mount	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	2700
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	100
Photobiological Risk Group	RG0
Total power consumption (W)	19
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288487373

### DATA TABLE

#### General data

Product name	SYLPROOF SUPERIA LED G3 600mm Twin 4K QC DALI
Technology	LED
Housing	Polyester
Mount	Ceiling surface mounting

## Sylproof Superia LED G3 DALI

*SYLPROOF SUPERIA LED G3 600mm Twin 4K QC DALI*  
0048737

General application	Logistics & Industry
Operating temperature range (°C)	-20°C - 40°C
ETIM Class	EC000109
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	2700
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	100
Photobiological Risk Group	RG0

### Electrical data

Total power consumption (W)	19
Mains voltage (V)	220-240V~
Mains frequency (Hz)	0/50/60Hz
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Drive current (mA)	300
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	DC/50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 16A C Breaker	36
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	17
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	27

### Lifetime data

Lifespan L70 B50	60000
Lifespan L80 B10	60000
Lifespan L90 B50	60000

### Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate

## Sylproof Superia LED G3 DALI

SYLPROOF SUPERIA LED G3 600mm Twin 4K QC DALI  
0048737

Nominal Product Length (mm)	665
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	1.18


### Packaging

Single packaging type	Carton
Product EAN number	5410288487373
Packaging single length / height (cm)	77.5
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288487373
Units per outer package	1
Packaging outer length / height (cm)	77.5
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

### Safety data

Optimal operating condition (°C)	-20-40
Dry applications use only	No

## PHOTOMETRY

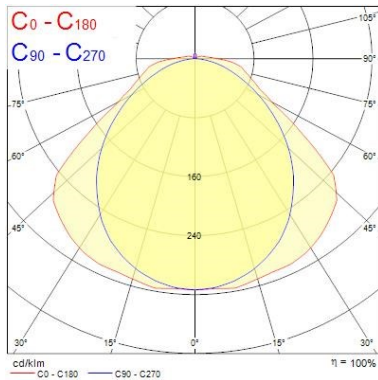

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>10%</sub> [lx]	E <sub>50%</sub> [lx]	E <sub>90%</sub> [lx]
0.5	1.17 1.92	3337	49.8° 58.7°	461	234
1.0	2.35 3.04	847	49.8° 58.7°	115	71
1.5	3.52 4.57	378	49.8° 58.7°	51	32
2.0	4.70 6.09	212	49.8° 58.7°	29	18
2.5	5.87 7.61	135	49.8° 58.7°	18	11
3.0	7.05 9.13	94	49.8° 58.7°	13	8

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 — C0 - C180 (Half beam angle: 113.4°)  
 — C90 - C270 (Half beam angle: 59.2°)

## TECHNICAL DRAWINGS

